

# Metal Signal Lamp

Quality as the root · Service as the base



## YJ-GQ Series Metal Signal Lamp

### GENERAL

1. Installation dimensions:  $\Phi 6/8/10/12/16/19/22/25$ mm.
2. Lamp voltage: 3、6、12、24、36、48、110、220V.
3. Wiring mode: screw terminal、pin terminal、10mm wires.
4. The material of shell: chrome plating of brass、stainless steel、aluminum alloy plating.
5. The material of lampshade: PC.
6. The material of terminal: brass.
7. The material of base: PA66.
8. IP degree: IP67.

### SPECIFICATION

Operating temperature	-25°C~ +55°C (Ice free)
Operating humidity	45-85%RH
Insulation resistance	$\geq 1000M\Omega$
Dielectric strength	1500VAC/50Hz/60s
Vibration resistance	50Hz, Amplitude 1.2mm
Shock resistance	> 10g
Solder heat resistance	when 320°C (or 30W electric iron), no more than 3 seconds

### LAMP SPECIFICATIONS

Lamp type	Two-way LED lamp	
Rated voltage	AC/DC 3V	AC/DC 6V
	AC/DC 12V	AC/DC 24V
	AC/DC 36V	AC/DC 48V
	AC/DC 110V	AC/DC 220V
Lamp color	R ● G ● Y ● B ● W ○	
Life	$\geq 40000$ h	

### PRODUCT SELECTION

☆shell material N: Chrome plating of brass / S: Stainless steel / A: Aluminum alloy plating    △ LED voltage 1.8V、3V、6V、12V、24V、36V、48V、110V、220V    ○LED color R ● G ● Y ● B ● W

Picture	Operation	Model	Shape Dimensions
	Φ6 Metal signal lamp (10mm wires)	YJ-GQ6A-D/N△○	
	Φ8 Metal signal lamp (pin terminal)	YJ-GQ8A-D/J/N△○	
	Φ10 Metal signal lamp (screw terminal)	YJ-GQ10A-D/J/N△○	
	Φ12 Metal signal lamp (pin terminal)	YJ-GQ12A-D/J/☆△○	
	Φ12 Metal signal lamp (screw terminal)	YJ-GQ12A-D/☆△○	

# Metal Signal Lamp














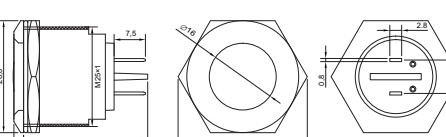

## YJ-GQ Series Metal Signal Lamp

### PRODUCT SELECTION

☆shell material N: Chrome plating of brass / S: Stainless steel / A: Aluminum alloy plating

△ LED voltage 1.8V、3V、6V、12V、24V、36V、48V、110V、220V

○LED color **R** **G** **Y** **B** **W**

Picture	Operation	Model	Shape Dimensions
	Φ 16 Metal signal lamp (pin terminal)	YJ-GQ16A-D/J/☆△○	
	Φ 16 Metal signal lamp (screw terminal)	YJ-GQ16A-D/☆△○	
	Φ 19 Metal signal lamp (pin terminal)	YJ-GQ19A-D/J/☆△○	
	Φ 19 Metal signal lamp (screw terminal)	YJ-GQ19A-D/☆△○	
	Φ 22 Metal signal lamp (pin terminal)	YJ-GQ22A-D/J/☆△○	
	Φ 22 Metal signal lamp (screw terminal)	YJ-GQ22A-D/☆△○	
	Φ 25 Metal signal lamp (pin terminal)	YJ-GQ25A-D/J/☆△○	
	Φ 25 Metal signal lamp (screw terminal)	YJ-GQ25A-D/☆△○	